

BCMA Series








FEATURES

- High common mode impedance at high frequency cause excellent noise suppression performance
- Designed to be low profile and Supports large currents (up to 6 A)
- Operating temperature range: -40 to +125°C(including self-temperature rise)
- AEC-Q200 qualified
- Quantity: 2000pcs



APPLICATION


- Headlamps, tail lamps and interior lighting
- HVAC
- Doors, window lift and seat control
- Audio subsystem
- Digital instrument cluster
- In-Vehicle Infotainment and navigation

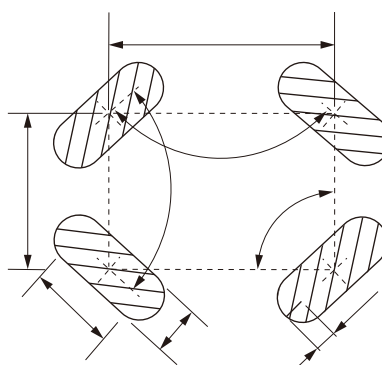

Part No	Inductance @100KHz/0.1V Min. 1-2=4-3	Leakage Inductance @100KHz/0.1V Typ.	Temperature Rise Current Max. 1-2=4-3	DC Resistance Typ. 1-2=4-3	DC Resistance Max. 1-2=4-3	Hi-Pot 3mA/1S 1,2-3,4
BCMA9030-4R5Y	4.50	0.05	5.5	9	15	500
BCMA9030-120Y	12.6	0.14	4.1	12	20	500





△

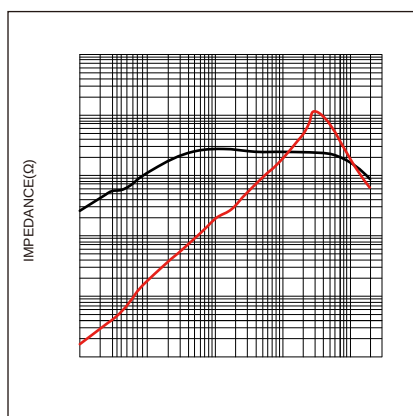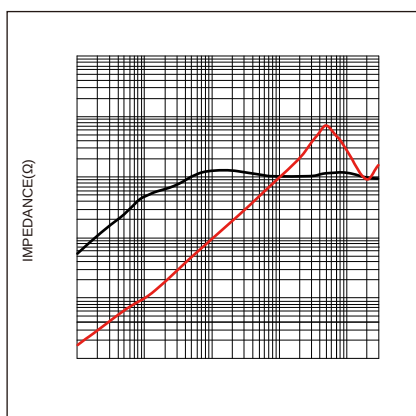

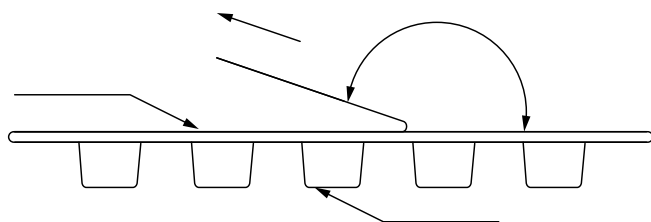


The peel force of top cover tape shall be between 0.20 to 1.17 N


:

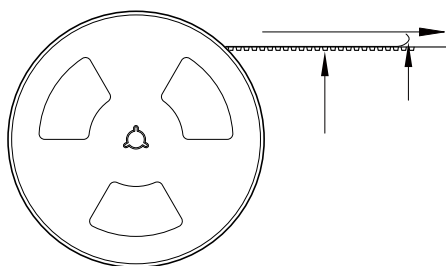

2000 Pcs/Reel



2 Reel /Inner box(4000 Pcs)



3 Inner box/Carton box(12K Pcs)

:

•

•

•

•

•

•

•

•