

FBE Series

SMD EMI Suppression Ferrite Bead

Size 0805




CHARACTERISTICS

-
-
-
-
-


APPLICATION

-
-

Dimensions: [mm]

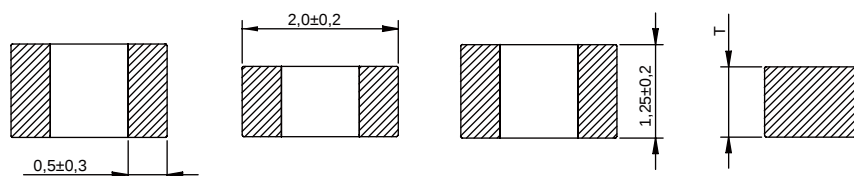

Land Pattern: [mm]



Electrical Properties:

Part No	Thickness T size	Impedance @100MHz	Tolerance	DCR	Temperature Rise
FBE0805-110-901R	0.85±0.20	11		0.10	900
FBE0805-170-601R	0.85±0.20	17		0.10	600
FBE0805-260-601R	0.85±0.20	26		0.10	600
FBE0805-300-601R	0.85±0.20	30		0.10	600
FBE0805-400-601R	0.85±0.20	40		0.10	600
FBE0805-600-901R	0.85±0.20	60		0.10	900
FBE0805-121-801R	0.85±0.20	120		0.20	800
FBE0805-151-801R	0.85±0.20	150		0.20	800
FBE0805-221-751R	0.85±0.20	220		0.30	750
FBE0805-301-701R	0.85±0.20	300		0.30	700
FBE0805-471-701R	0.85±0.20	470		0.35	700
FBE0805-601-501R	0.85±0.20	600		0.40	500
FBE0805-102-401R	0.85±0.20	1000		0.45	400
FBE0805-152-351R	0.85±0.20	1500		0.50	350
FBE0805-202-251R	0.85±0.20	2000		0.60	250
FBE0805-070-601R	0.85±0.20	7		0.10	600
FBE0805-300-701R	0.85±0.20	30		0.20	700

Part No	Thickness T size	Impedance @100MHz	Tolerance	DCR	Temperature Rise
FBE0805-600-701R	0.85±0.20	60		0.20	700
FBE0805-121-601R	0.85±0.20	120		0.25	600
FBE0805-151-601R	0.85±0.20	150		0.25	600
FBE0805-221-401R	0.85±0.20	220		0.30	400
FBE0805-301-401R	0.85±0.20	300		0.35	400
FBE0805-471-401R	1.25±0.20	470		0.40	400
FBE0805-601-301R	1.25±0.20	600		0.45	300
FBE0805-102-501R	0.85±0.20	1000		0.35	500

°C

°C

°C

Impedance & Frequency Characteristics:

