

MCCM Series

Multilayer Chip Common Mode Filter

Size 0806





FEATURES

- Effective for suppressing common mode noise at high frequency.
- Excellent solderability characteristics.
- Small size & low profile.
- Multilayer type SMD component based on LTCC technology.
- Operating temperature: -40 to +85 °C


APPLICATION

- Common mode noise suppression of high speed differential signal lines, such as MIPI, MHL, HDMI, IEE802.3 in mobile phone, tablet PC, TV etc.


Dimensions: [mm]



Land Pattern: [mm]



Schematic:



Electrical Properties:




MCCM0806U-2-120M	12	±5 Ω	2.5	130	100	> 8
MCCM0806U-2-350M	35	±20%	3.5	100	100	> 6
MCCM0806U-2-470M	47	±20%	4.0	100	100	6
MCCM0806U-2-900M	90	±20%	4.5	100	100	3.5

MCCM0806F-2-300M	30	±20%	3.0	100	5	10	12.5
MCCM0806F-2-900M	90	±20%	4.0	100	5	10	12.5
MCCM0806F-2-121M	120	±20%	4.0	100	5	10	12.5


MCCM0806F-2-551M	550	±25%	10.0	50	10	12.5	

Typical Electrical Characteristics:

Impedance & Frequency Characteristics(Common):

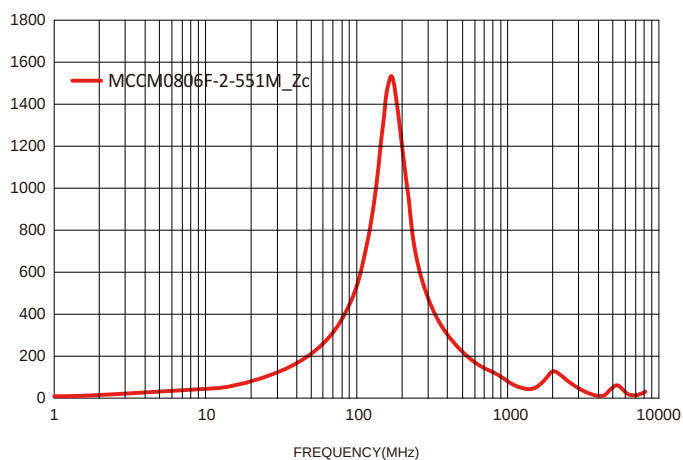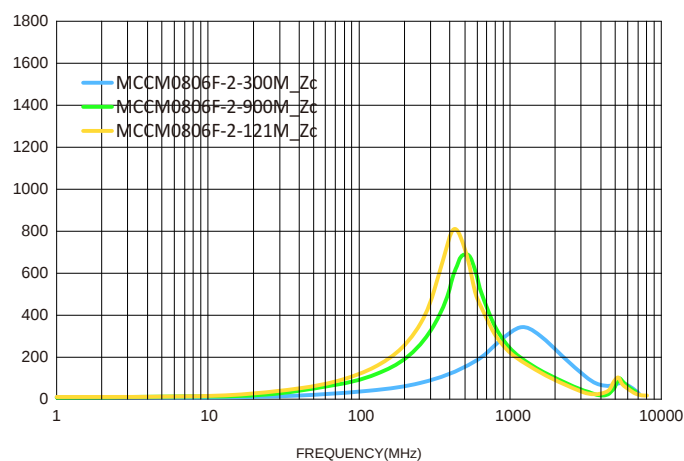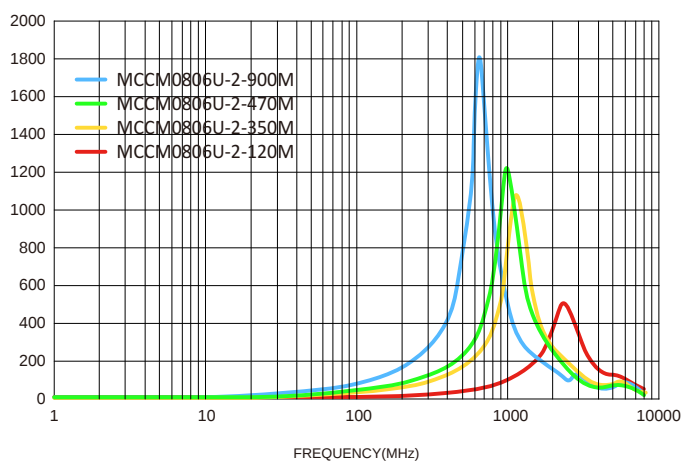

Typical Electrical Characteristics:

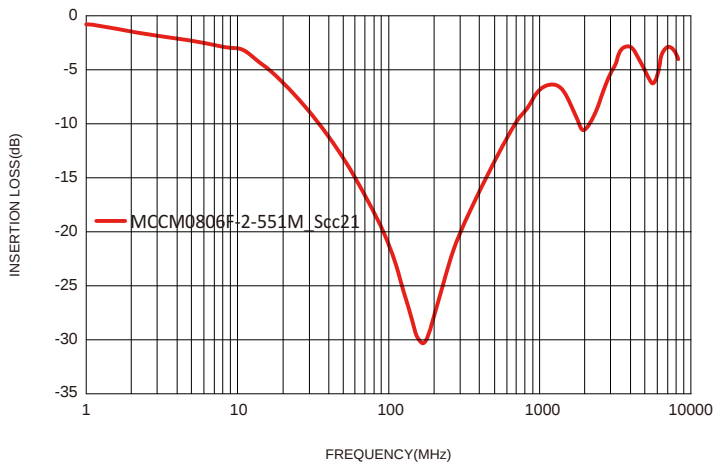

Insertion loss & Frequency Characteristics(Differential):

