


MDE Series



FEATURES



^oC


APPLICATION

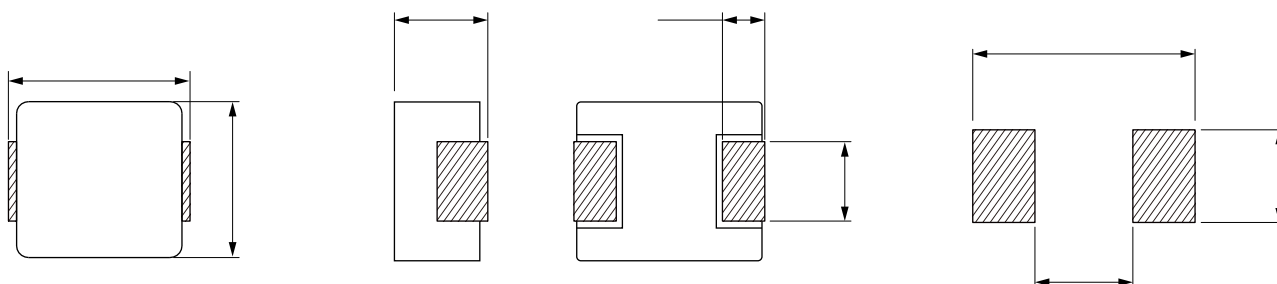[illegible]

	(μ H)		(m Ω)	Saturation	


△

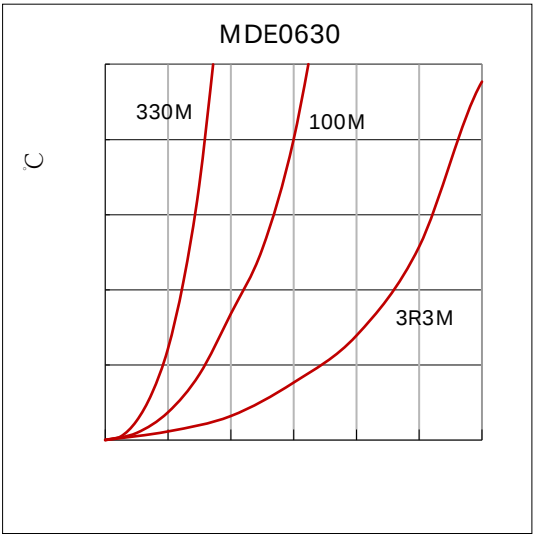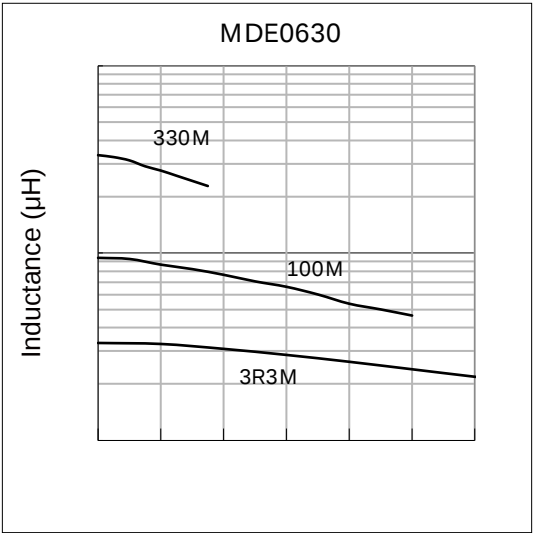

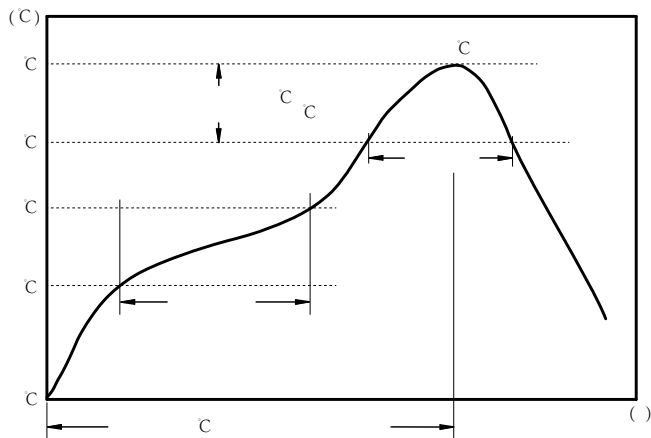


C
C
C

:

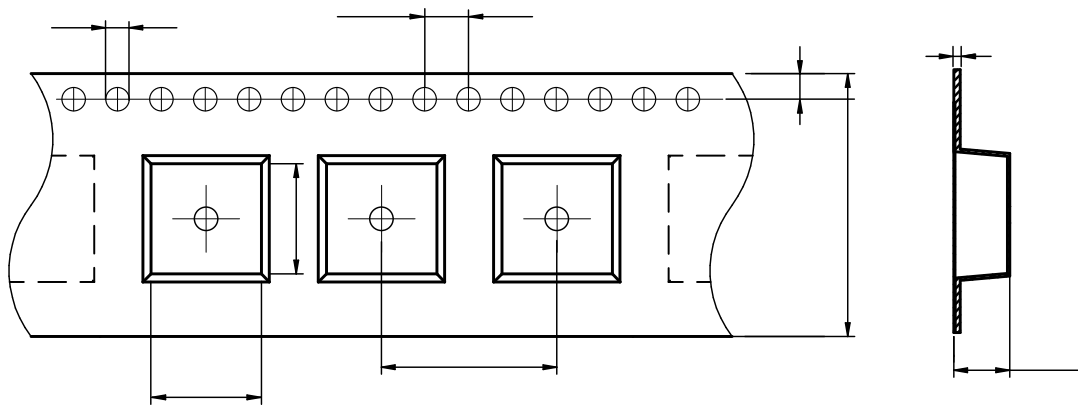







0630	7.0 ± 0.1	7.7 ± 0.1	1.5 ± 0.1	4.0 ± 0.1	12.0 ± 0.1	16.0 ± 0.1	1.35 ± 0.1	1.75 ± 0.1	0.35 ± 0.05

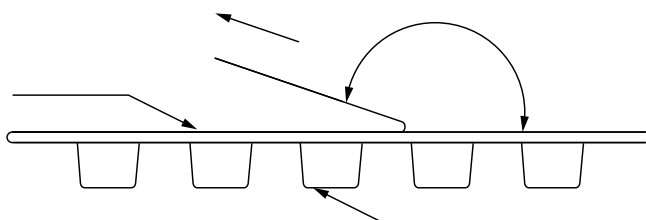

The peel force of top cover tape shall be between 0.1 to 1.3 N

Marking	Printing (Inductance)
---------	-----------------------

:

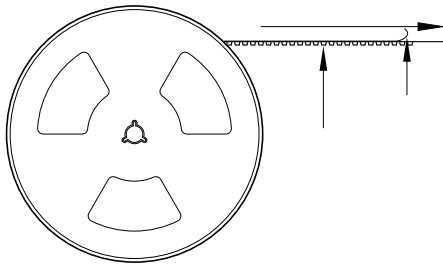

1500 Pcs/Reel

2 Reel /Inner box(3K Pcs)

3 Inner box/Carton box(9K Pcs)

:

- tions (temperature: -5 to 35°C, humidity: 75% RH Max).If the storage period elapses, the soldering of the

•

•

•

•

•

•

•