


MDSA Series




FEATURES

- Capable of corresponding high frequency .
- Low loss realized with low DCR.
- High performance (Isat) realized by metal dust core.
- 100% Lead(Pb)-Free and RoHS compliant.
-
-
-


APPLICATION

-
-
-

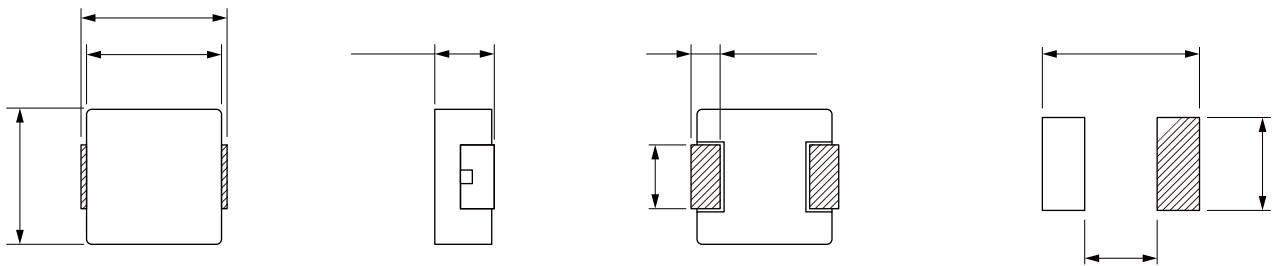


	1.00	±20%	24.0	32.0	2.80	3.2	
		±20%	22.0	26.0	3.60	4.0	
	2.20	±20%	19.0			6.0	3.0±0.3
	3.30	±20%		17.0	8.40		3.0±0.3
	4.70	±20%			9.70	10.9	3.0±0.3
		±20%			13.0	14.8	3.0±0.3
	6.80	±20%	11.6			17.8	3.0±0.3
	8.20	±20%	9.6	13.0		19.3	3.0±0.3
	10.0	±20%	7.2			22.4	3.0±0.3
		±20%	6.2	8.1	33.0	40.0	3.0±0.3
	22.0	±20%					3.0±0.3
	33.0	±20%				88.0	3.0±0.3
	47.0	±20%	4.2	3.8	108.0	130.0	3.0±0.3



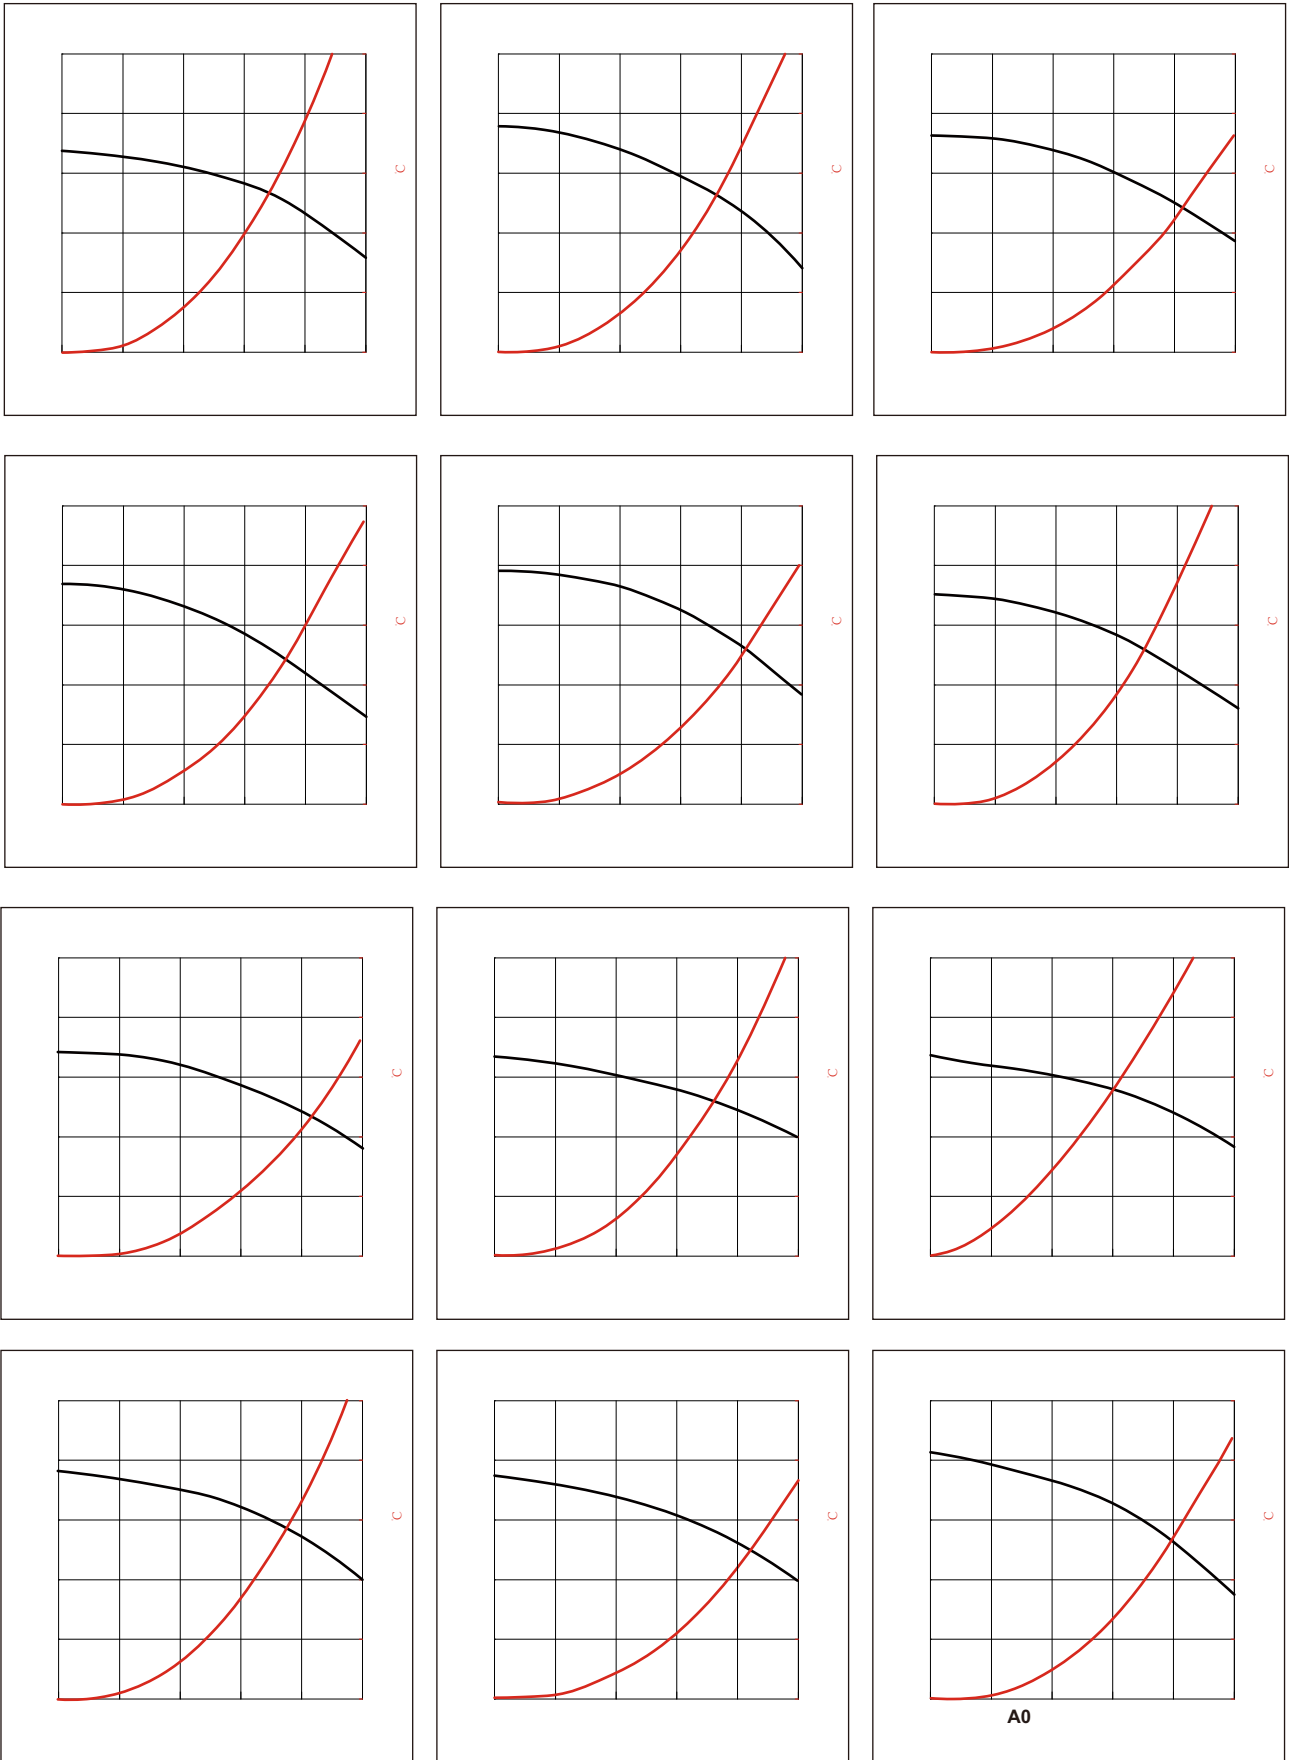




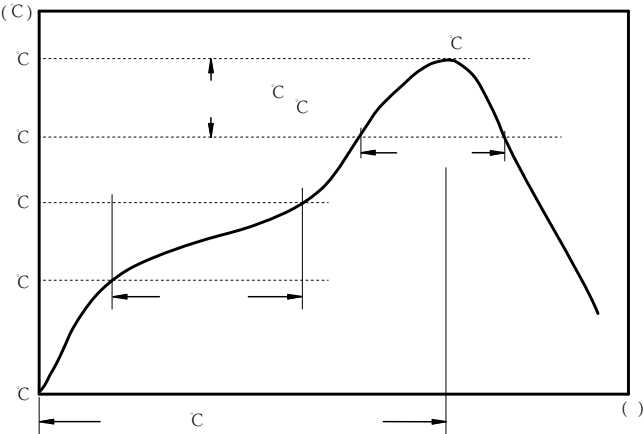




:

MDSA1050	10.4±0.1	11.6±0.1	1.5±0.1	4.0±0.1	16.0±0.1	24.0±0.3	5.4±0.1	1.75±0.1	0.40±0.05

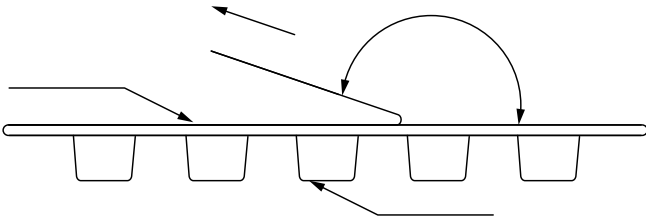


The peel force of top cover tape shall be between 0.1 to 1.3 N


Marking	KH+Printing (Inductance)
---------	--------------------------

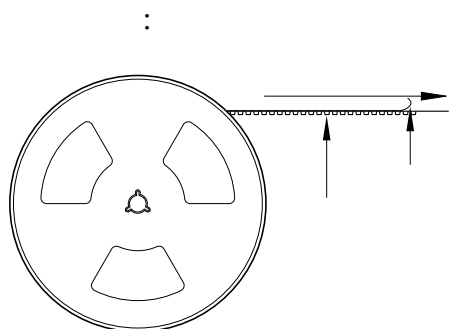

500 Pcs/Reel



2 Reel /Inner box(1000 Pcs)



3 Inner box/Carton box(3K Pcs)

:

•

•

•

•

•

•

•

•