


MDTA Series




FEATURES


- / 0Ψμ0σ00\$ 000\$ Ψ0000P 0PP0Xσ 00°0 σ0000Γ00 0000\$00σ
- 3\$0bl P0X 000σΓ0 000\$ 00\$ 0\$0bl P0X P\$00°\$ 000\$ 000\$
- Ω 0μ0000bl 00\$ 00\$P\$σ 00°0 0 000\$Ω Ω ≡
- / v ξ00P00\$
- hμ\$00Γ0° 0\$Ψμ\$000\$ 00 °C 00P00\$0° σ\$P0 0\$Ψμ\$000\$ 00\$
- v00Γ0bl μ0σ

APPLICATION


- 5/ 5/ 000\$00\$0σ 000 \$00\$000Ψ\$00 Ω00° 0Γ00 σblσΨσ
\$σ000 σ Χ00\$σ00\$P\$
μ0X\$0 Ψ0000σ 0\$0Γ0° 00\$ 0\$0ΓP0Γ00 0P0X\$0σ 00°0Γ0°
- [95 000Φ

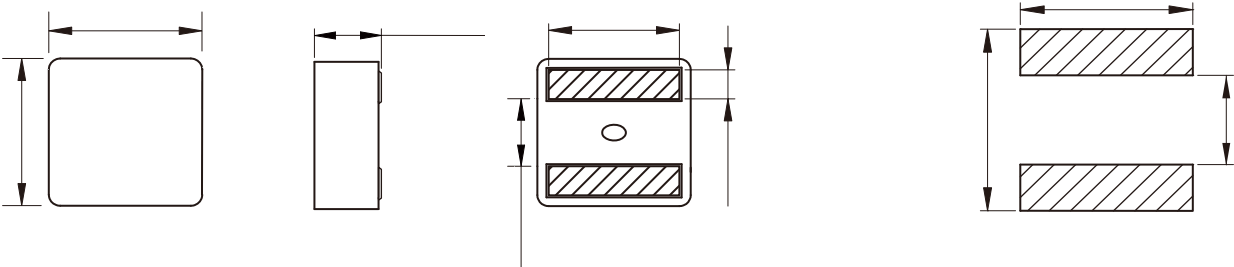


Part No	L@100KHz /0.1V	Tolerance	I _{SAT} Typ.	I _R		R _{DC} Max.
				20°C rise	40°C rise	
a5£! w a						
a5£! w a						
a5£! w a						
a5£! w a						
a5£! a						
a5£! a						
a5£! a						
a5£! a						

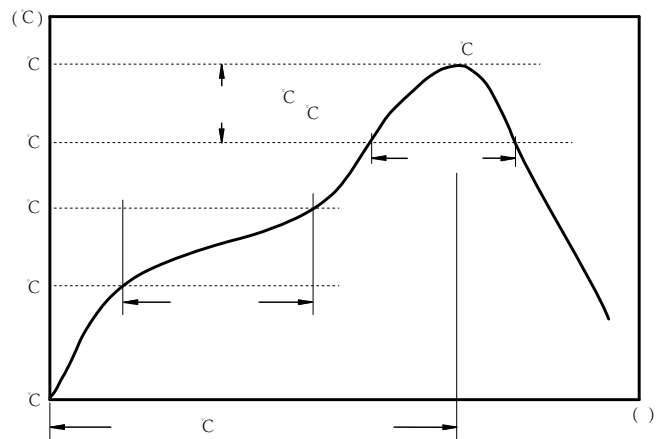

C
C
C

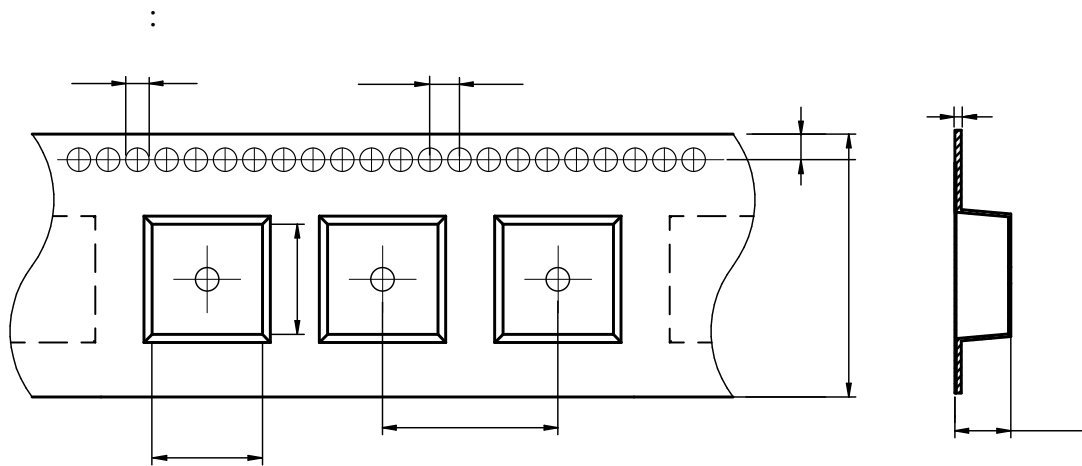

MDTA1510	17.0±0.1	16.0±0.1	1.5±0.1	4.0±0.1	24.0±0.1	32.0±0.3	10.5±0.1	1.75±0.1	0.50±0.05

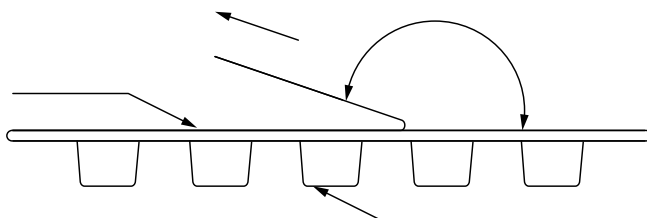

The peel force of top cover tape shall be between 0.1 to 1.3 N

Marking	Printing (Inductance)
---------	-----------------------

