





.....


°C

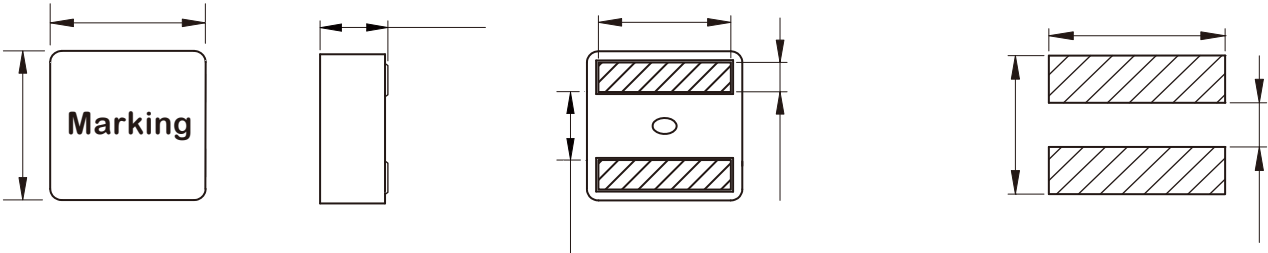


| Part No | Inductance<br>@ 100KHz/0.1V<br>(μH) | Tolerance | Saturation<br>Current<br>Typ.<br>(A) | Saturation<br>Current<br>Max.<br>(A) | Temperature<br>Rise Current<br>Typ.<br>(A) | DC<br>Resistance<br>Max.<br>(mΩ) | D<br>(mm) |
|---------|-------------------------------------|-----------|--------------------------------------|--------------------------------------|--------------------------------------------|----------------------------------|-----------|
|         |                                     |           |                                      |                                      |                                            |                                  |           |
|         |                                     |           |                                      |                                      |                                            |                                  |           |
|         |                                     |           |                                      |                                      |                                            |                                  |           |
|         |                                     |           |                                      |                                      |                                            |                                  |           |
|         |                                     |           |                                      |                                      |                                            |                                  |           |
|         |                                     |           |                                      |                                      |                                            |                                  |           |
|         |                                     |           |                                      |                                      |                                            |                                  |           |
|         |                                     |           |                                      |                                      |                                            |                                  |           |

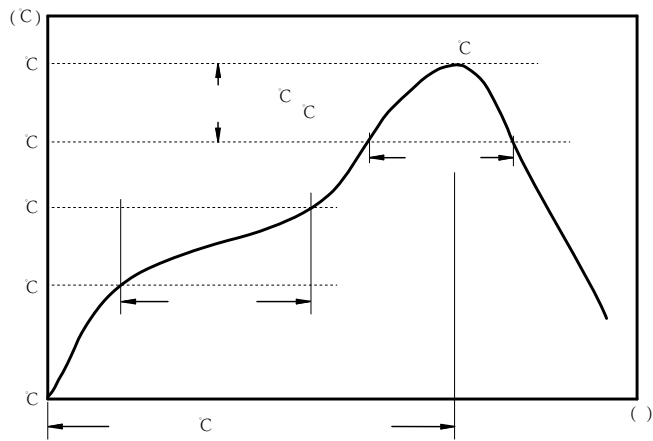

C  
C  
C



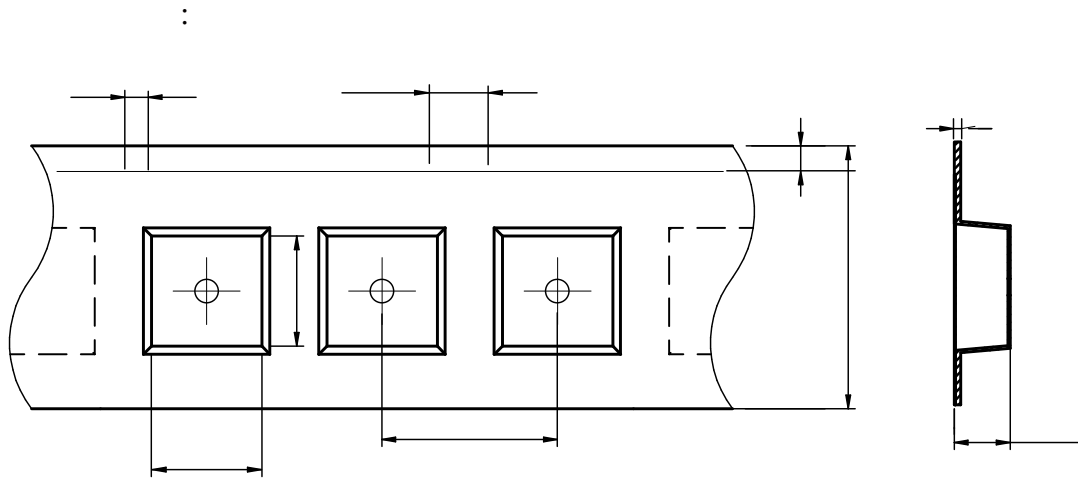


| MDTE6050 | $7.0 \pm 0.1$ | $6.8 \pm 0.1$ | $1.5 \pm 0.1$ | $4.0 \pm 0.1$ | $12.0 \pm 0.1$ | $16.0 \pm 0.3$ | $5.3 \pm 0.1$ | $1.75 \pm 0.1$ | $0.35 \pm 0.05$ |
|----------|---------------|---------------|---------------|---------------|----------------|----------------|---------------|----------------|-----------------|

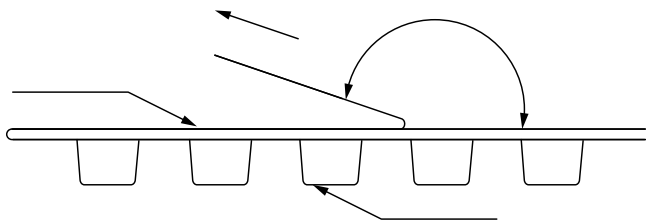

The peel force of top cover tape shall be between 0.1 to 1.3 N


|         |                       |
|---------|-----------------------|
| Marking | Printing (Inductance) |
|---------|-----------------------|

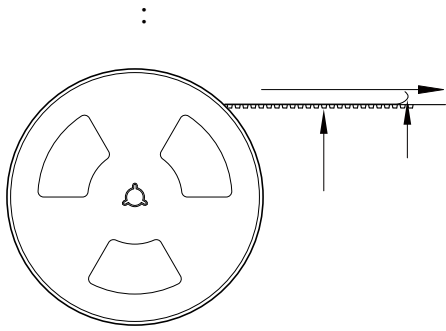

800 Pcs/Reel



2 Reel /Inner box(1600 Pcs)



3 Inner box/Carton box(4.8K Pcs)

:

•

•

•

•

•

•

•

•