

NRSA Series

SMD Power Inductors For Automotive

Size 201610



FEATURES


-
-
-
-
-
-

APPLICATION

-

Dimensions: [mm]

Land Pattern: [mm]

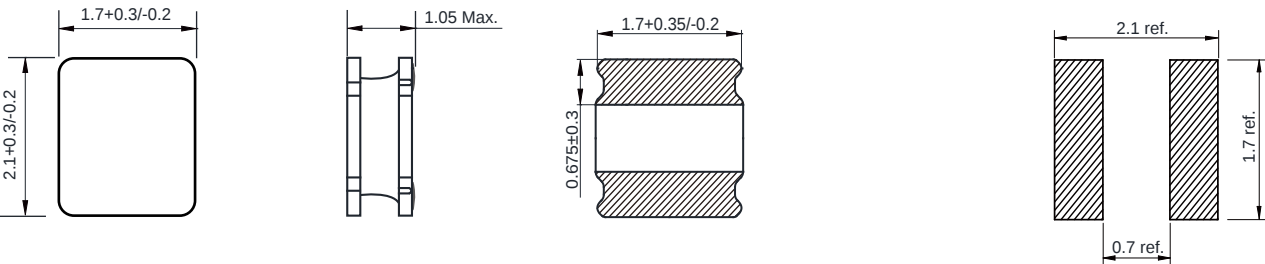


Electrical Properties:

Saturation Current will cause L to drop approximately 35%
 Temperature Rise Current: The actual value of DC current when the temperature rise is $\Delta T=40^{\circ}\text{C}$

Typical Electrical Characteristics:

Soldering Reflow:

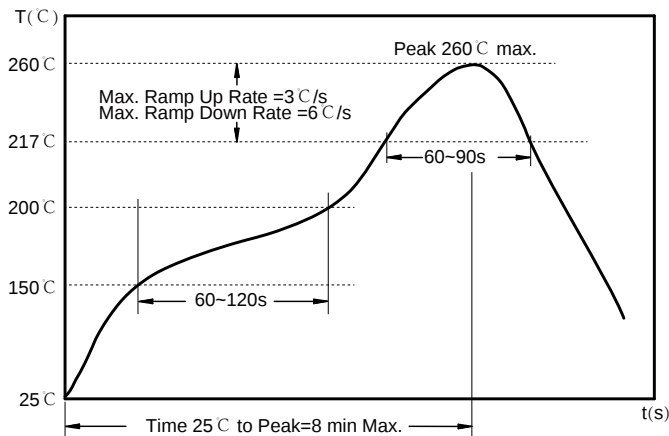

Preheat condition: 150 ~200 $^{\circ}\text{C}$ / 60~120 sec.


Allowed time above 217 $^{\circ}\text{C}$: 60~90 sec.

Max temperature: 260 $^{\circ}\text{C}$.

Allowed Reflow time: 2x max.


Packaging Information:

Tape Dimension:

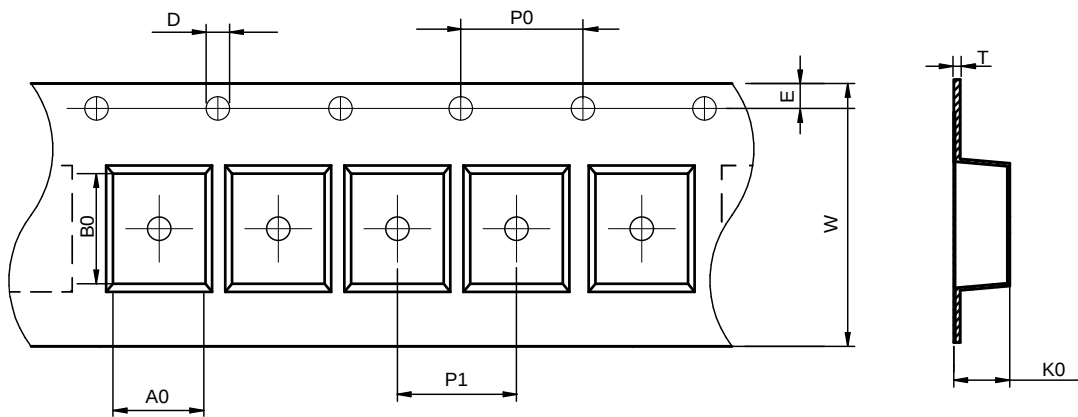


Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
NRSA201610	1.9 $\pm$ 0.05	2.2 $\pm$ 0.05	1.5 $\pm$ 0.1	4.0 $\pm$ 0.1	4.0 $\pm$ 0.1	8.0 $\pm$ 0.3	1.20 $\pm$ 0.05	1.75 $\pm$ 0.1	0.25 $\pm$ 0.02

Peel force of top cover tape:

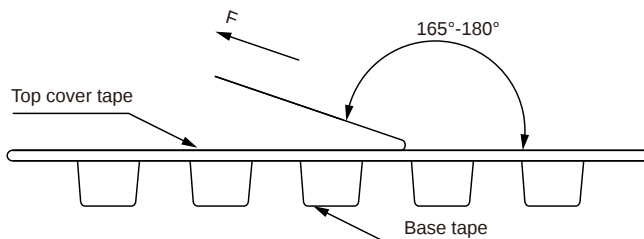


The peel force of top cover tape shall be between 0.2 to 0.58 N

Reel Dimension: [mm]

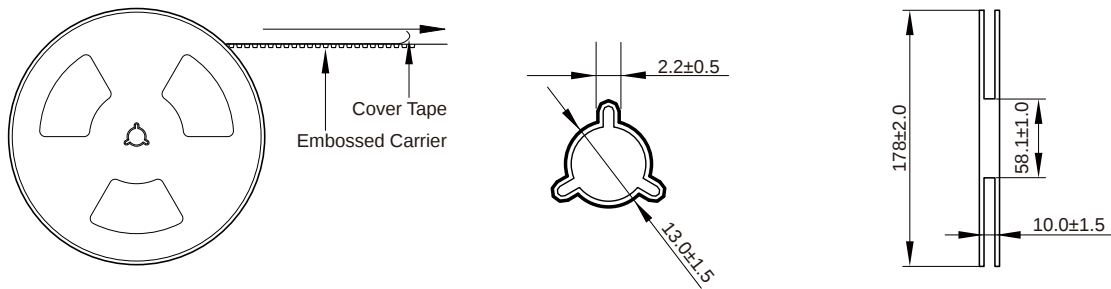

Packaging Quantity:

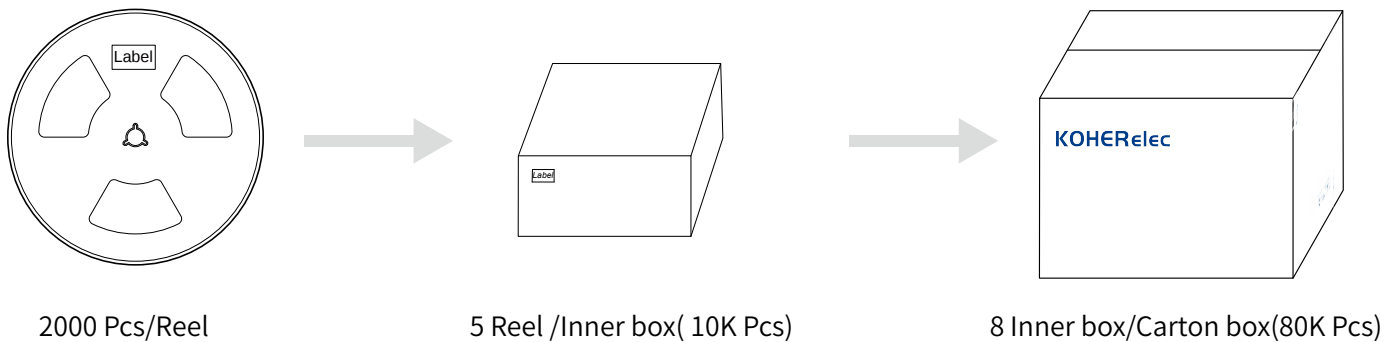

Cautions and Warnings:

Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C , humidity: 75% RH Max). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C .
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does. As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.