

SCM Series







FEATURES

-
-
-
-
-



C


APPLICATIONS

-
-
-

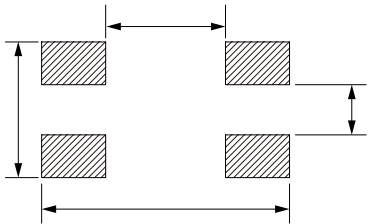





Model	Length (mm)	Width (mm)	Height (mm)	Weight (g)	Resistance (Ω)	Inductance (mH)	Capacitance (pF)
SCM3216-900-04	90	±25%	0.30	400	50	125	10
SCM3216-121-03	120	±25%	0.30	350	50	125	10
SCM3216-161-03	160	±25%	0.40	350	50	125	10
SCM3216-221-03	220	±25%	0.45	300	50	125	10
SCM3216-261-03	260	±25%	0.50	300	50	125	10
SCM3216-361-03	360	±25%	0.60	300	50	125	10
SCM3216-601-03	600	±25%	0.80	300	50	125	10
SCM3216-102-02	1000	±25%	1.00	200	50	125	10
SCM3216-222-02	2200	±25%	1.20	200	50	125	10

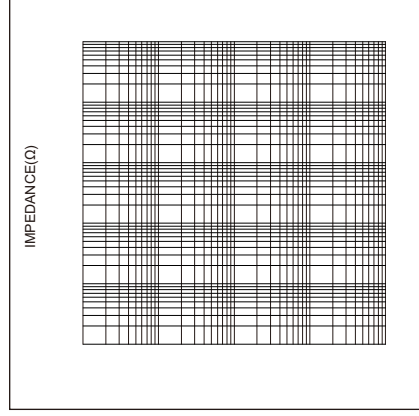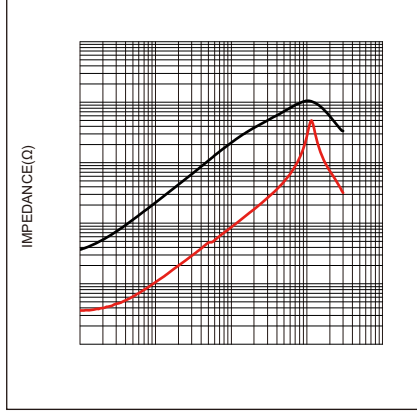

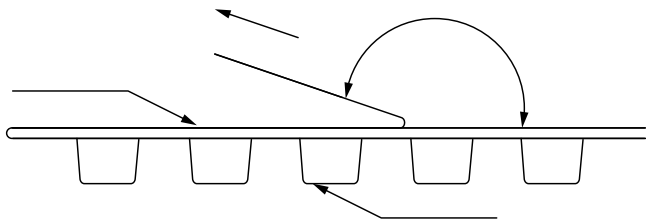


The peel force of top cover tape shall be between 0.1 to 1.0 N


:

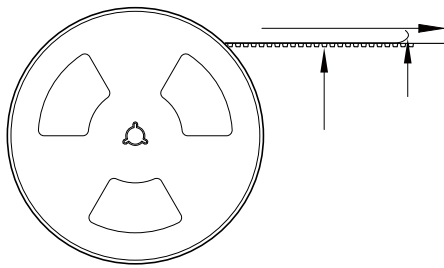

2000 Pcs/Reel



5 Reel /Inner box(10K Pcs)



8 Inner box/Carton box(80K Pcs)

:

•

•

•

•

•

•

•

•

•

•

•

•

•